


DNA/DNR-DIO-462-800

Guardian™ 12-Channel Form C Relay Output Board

The Guardian Advantage

- Programmable overcurrent protection (50 mA to 2 A)
- Programmable overcurrent duration limits
- Automatic detection of shorts/open and other system failures
- DNR-DIO-462-800 for use with RACKtangle I/O chassis
- DNA-DIO-462-800 for use with "Cube" I/O chassis
- 2 A continuous output current at 30 VDC
- 750 mA continuous output current at 125 VAC
- 200 milliohm on resistance
- Output throughput rate of 125 updates per second

10-Year
Availability
Guarantee

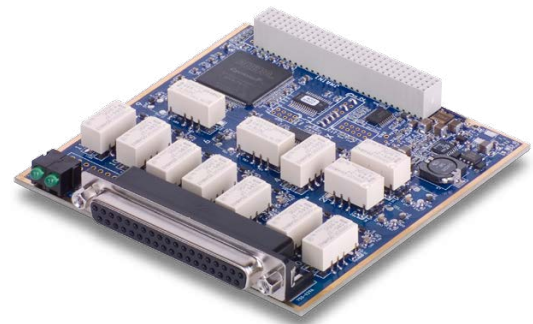

DNA-DIO-462-800 boards are for use in "Cube" chassis while the DNR-DIO-462-800 is designed for use in RACKtangle™ chassis

General Description:

The DNA-DIO-462-800/DNR-DIO-462-800 are 12-channel, electromechanical relay boards designed for use with UEI's "Cube" and RACKtangle chassis, respectively. Electronically, they are identical. Based on UEI's popular DNx-DIO-462, the DIO-462-800 is specifically designed for maintenance trainer applications or other applications which require "off" impedance greater than 100 MegOhm. (The standard DIO-462 "off" impedance spec is > 2 MegOhm.)

DNx-DIO-462-800 relays are in a Form C (SPDT) configuration and are rated for continuous operation at 2A at 30 VDC, and .75 Amp at 125 VAC. Contacts are rated for 10 million operations. The board provides an ON resistance of less than 200 milliohms and update rates up to 125 Hz.


The DIO-462-800 is part of UEI's Guardian series. It not only controls the relay outputs, it also provides a powerful output monitoring capability. An on-board A/D converter allows you to monitor AC or DC output current. This allows the application to detect short and open circuits as well as other "suspicious behavior". The monitoring capability is also a powerful diagnostic tool that allows a repair technician to quickly and accurately identify damaged or mis-wired channels.

The Guardian advantage also includes programmable overcurrent protection. The user may select the overload current up to one second before the channel is shut down. Each board provides 350 Vrms isolation between channels, as well as between the board, cube, and other installed I/O boards.

All connections are made through 37-pin D connectors that ensure that mating cables or connectors are readily available. Users may also use the DNA-STP-37 screw terminal panel via DNA-CBL-37 or -37S series cables.

The DNx-DIO-462-800 includes software drivers supporting all popular operating systems including: Windows, Linux, QNX, VXWorks, RTX, and other popular Real-Time Operating Systems. Our UEIDAQ Framework provides Windows users a simple and complete software interface to all popular programming languages and data acquisitions and control applications (e.g., LabVIEW, DASyLab, MATLAB).

Block Diagram:

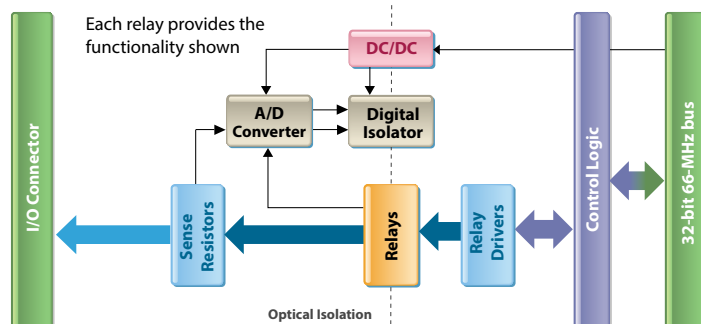

Technical Specifications:

Output specifications	
Rated Load	2 A at 30 VDC, 0.75 A at 125 VAC continuous
Max Switching Capacity	94 VA, 90 W
Max Operating Voltage	220 VDC, 250 VAC
Min Permissible Load	10 μ A, 10 mVDC
Contact Material	Ag (Au clad)
Contact ON impedance	200 mOhm max (at the I/O connector)
Contact OFF impedance	>100 MOhm
Off Leakage Current	< 100 μ A
Turn-On Time	4 mS max, 2.5 mS typ
Turn-Off Time	4 mS max, 1.5 mS typ
Max Operating Freq.	125 operations/second (36000/hour limit)
Service Life	
Mechanical	100 000 000 min
Electrical	100 000 at 2 A 30 VDC or 0.75 A and 125 VAC
Monitor/circuit breaker specs	
Resolution	16 bit
Ranges	\pm 2 A DC
	0.3-2 A AC
	-55/+100 $^{\circ}$ C
Accuracy	
DC Current	5% of measurement + 0.25% of the full scale
Relay Temperature	\pm 2 $^{\circ}$ C typ
Protection (only one type activated per channel)	
DC Current	50 mA to 2 A
AC Current	400 mA to 2 A
Relay Temperature	0-85 $^{\circ}$ C
Disconnection Time	1 sec
Power up / reboot state	Off (NC Energized)
Power dissipation	< 3.5 W
Isolation	350 Vrms
Operating Temp. Range	Tested -40 to +85 $^{\circ}$ C
Operating Humidity	95%, non-condensing
Vibration	IEC 60068-2-6 5 g, 10-500 Hz, sinusoidal
	IEC 60068-2-64 5 g (rms), 10-500 Hz, broad-band random
Shock	IEC 60068-2-27 50 g, 3 ms half sine, 18 shocks @ 6 orientations 30 g, 11 ms half sine, 18 shocks @ 6 orientations
Altitude	2000 meter, full specs. Derated thereafter. Please contact the factory for further details.
MTBF	260,000 hours

Connection Options:

Terminal Panels	Matching Cable	Description
DNA-STP-37	DNA-CBL-37 series	Connects all I/O signals to easy to use screw terminals

Pinout Diagram:

DB-37 (female)
37-pin connector:

